
Application server settings

The default setting for the application server in Service Scheduler is [AUTODISCOVER] this will attempt to find the server user DNS SRV records.

If DNS is not configured or testing connectivity issues, the hostname can be adjusted.



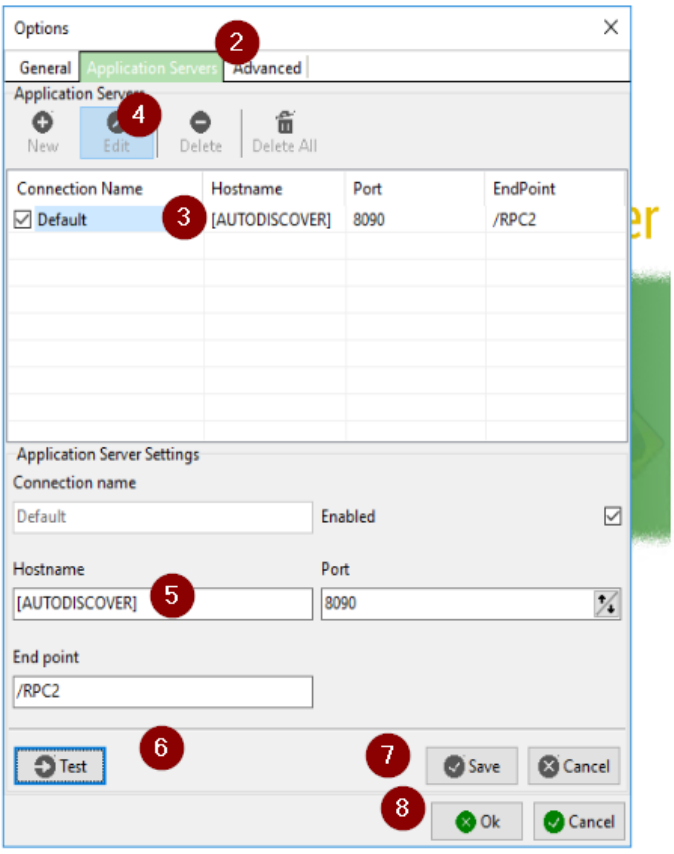

> NOTE: DNS is the recommended method with the next preference being a hostname (eg servsched) this makes future upgrades or migrations to new servers easier.

Revision #1
Created 2024-07-10 07:17:54 UTC by ABit Software

Updated 2024-07-11 06:06:31 UTC by ABit Software