
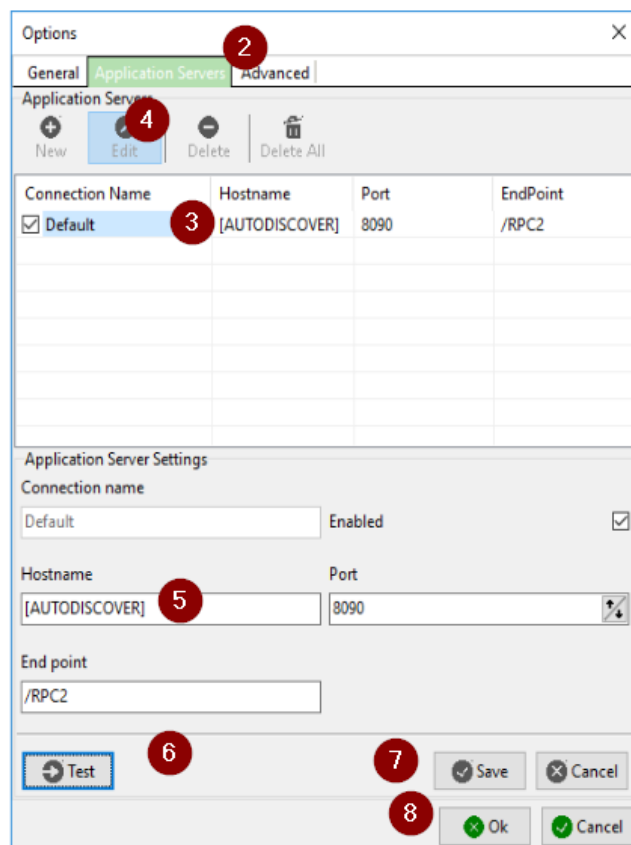


# Application server settings

The default setting for the application server in Service Scheduler is [AUTODISCOVER] this will attempt to find the server user DNS SRV records.

If DNS is not configured or testing connectivity issues, the hostname can be adjusted.



NOTE: DNS is the recommended method with the next preference being a hostname (eg servsched) this makes future upgrades or migrations to new servers easier.

